

Stainless Steel Submersible Pump

Pump Specifications:

0.4 HP 1-1/4" Outlet
 0.6 HP 1-1/2" Outlet

Flow up to 42 GPM (159 lpm)
 Head up to 26 ft. (8 m)
 Max Temperature 122°F (50°C)


Thermoplastic Impeller
 Includes Float Switch (Can operate completely or partially submersed)
 Solids: .197in/mm

Applications:

- Draining water
- Draining mildly aggressive, non-flammable liquids



XAS

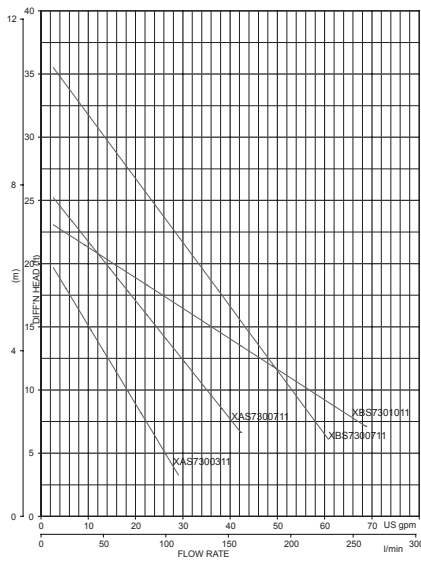

Stainless Steel Submersible Pump

Pump Specifications:

0.8 1-1/2" Outlet (Solids: .394in/10mm)
 1.0 2" Outlet (Solids: 1.379in/mm)

Flow up to 68.6 GPM (260 lpm)
 Head up to 35 ft. (10.6 m)
 Max Temperature 122°F (50°C)

304 Stainless Steel Impeller
 Can Operate Completely or Partially Submersed

Applications:

- Draining Tanks
- Pumping Dirty Water and Sewage
- Domestic and Industrial Waste Water



XBS